



1544 Globo

Housing: In vandal resistant and V2 self-extinguishing polycarbonate, UV stabilized.

Diffuser: In anti-glare, vandal resistant and V2 self-extinguishing polycarbonate, UV stabilized, smooth outside, dustproof.


Reflector: In polished aluminium and white polycarbonate.

Lampholder: In polycarbonate, phosphor bronze contacts. Socket G23; E27.

Electric gear: 230V/50Hz power supply. Hard wire 0.75 sqmm cross-section and PVC-HT sheath resistant up to 90°C according to CEI 20-20 standards or hard silicone wire with glass braid, 0.75 sqmm cross-section. 2P or 2P+T terminal block with maximum allowed lead cross-section of 2.5 sqmm.

Equipment: Gasket in environment-friendly material. Cable gland in fiber glass nylon Ø 1/2 gas thread (cable min. Ø 9 max. Ø 12).

Regulations: Produced according to applicable IEC 598 - CEI 34 - 21 standards, IP65 degree of protection according to EN 60529 standards. Double insulation.

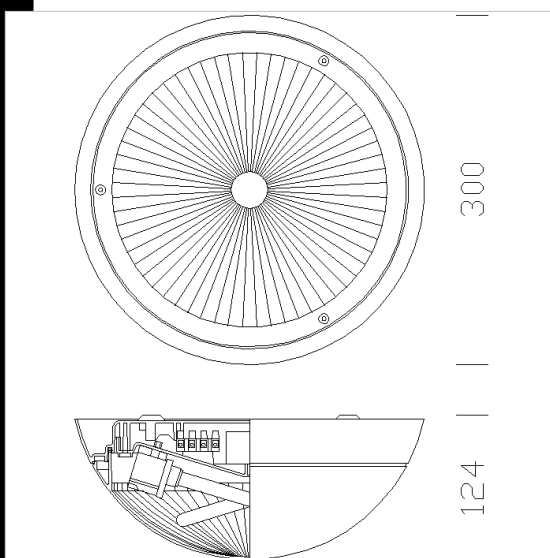

Download

DXF 2D
- 1544globo.dxf

3DS
- 1544_globo.3ds

3DM
- 1544_globo.3dm

Montaggi
- cano globo.pdf

Code	Gear	Kg	Watt	Base	Lamps	Colour
427247-08	CELL	1,70	FLC 2x9S	G23	600lm-4000k-Ra 1b	GREY
427247-01	CN-L	1,70	FLC 2x9S	G23	--	GREY
427246-00	S	0,77	INC 100	E27	1380lm-2700K-Ra 100	GREY