



Download

DXF 2D
- milanosl.m.dxf

Montaggi
- MILANO opt.pdf



Milano - FM

Adequate lighting ensures proper perception of the environment and enables us to feel comfortable with our surroundings. This is the concept underlying the creation of the Milano recessed floodlight, ideal for quick, low-cost installation in any exhibition setting and fulfil interior decorators' artificial lighting requirements.

Housing: Made of steel sheet.

Reflector: in die-cast polished aluminium, high efficiency and anti-glare.

Standard supply: Includes adjustable steel bracket.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

LED COB 24W - 3200lm - 3000K - CRI93 - 38°

LED COB 25W - 3100lm - 4000K - CRI92 - 38°


LED COB 49W - 6400lm - 4000K - CRI92 - 38°

LED COB CREE 63W - 7600lm - 4000K - CRI92 - 38°

Luminous flux maintenance 80%: 50.000h (L80B20).

Power factor >0.95

Photobiological safety class: exempt group EN62471.

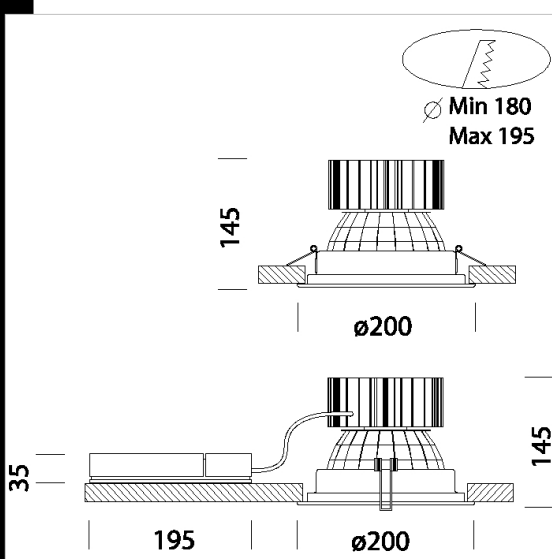

Code	Gear	Kg	Watt	Base	Lamps	Colour
22081371-00	CLD CELL	1.01	LED COB 24W		3200lm-3000K-CRI 93	WHITE
22081372-00	CLD CELL	1.01	LED COB 25W		3100lm-4000K-CRI 92	WHITE
22081373-00	CLD CELL	1.20	LED COB 49W		6400lm-4000K-CRI 92	WHITE
22081374-00	CLD CELL	1.60	LED COB CREE 63W		7600lm-4000K-CRI 92	WHITE