



3117 Ghost LED - painted diffuser



Housing: In die-cast aluminium, with wide cooling fins.
 Diffuser: All in clear polycarbonate. Prismatic inside for better light control. Smooth outside, dust-proof and impact-resistant, vandal-resistant, V2 self-extinguishing and UV stabilised. The reflector is metallized inside with a C.V.D. high vacuum process using high grade aluminium powders for higher efficiency.
 Coating: Multistage process. Stage 1: gris epoxy cationic electrocoating, resistant to corrosion and briny mist. Stage 2: UV-stabilising priming. Stage 3: sandblasted silver acrylic finishing.
 Equipment: Suspension hook. Rubber cable gland \varnothing 1/2" gas thread (cable min \varnothing 9, max \varnothing 12).
 Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards. IP43IK08 degree of protection according to EN 60529 standards. This product can be installed on normally inflammable surfaces.
 LED: Latest generation LED technology, Ta-30 + 40°C life 50.000h to 80% L80B20
 Photobiological safety class: exempt group EN62471.
 LED 4000K - 3000/5000lm - 25/40W - CRI 90

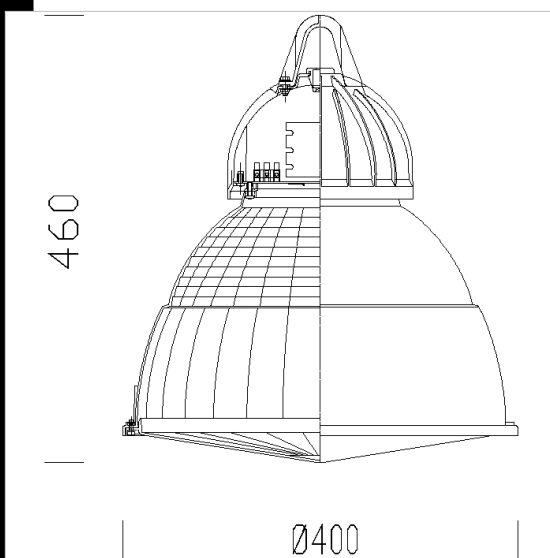

Code	Gear	Kg	Watt	Base	Lamps	Colour
323129-00	CLD CELL	3.01	LED white 40W	-	5000lm-4000K-CRI 90	GREY9007
323128-00	CLD CELL	3.31	LED white 25W	-	3000lm-4000K-CRI 90	GREY9007

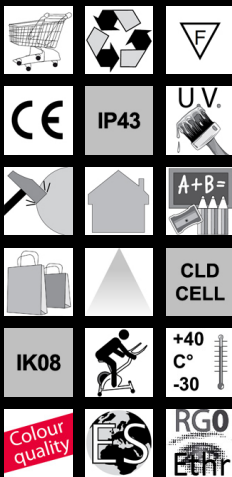

Download
DXF 2D
- 3116.dxf