


**1844 Globo LED**

Housing: In vandal resistant and V2 self-extinguishing polycarbonate, UV stabilized.  
 Diffuser: In anti-glare, vandal resistant and V2 self-extinguishing polycarbonate, UV stabilized, smooth outside, dustproof.  
 Equipment: Gasket in environment-friendly material. Cable gland in fiber glass nylon Ø 1/2 gas thread (cable min. Ø 9 max. Ø 12).  
 Regulations: Produced according to applicable IEC 598 - CEI 34 - 21 standards, IP65 degree of protection according to EN 60529 standards. Double insulation.  
 LED white: 14W - 4000K - 1500lm Photobiological safety class: exempt group EN62471.

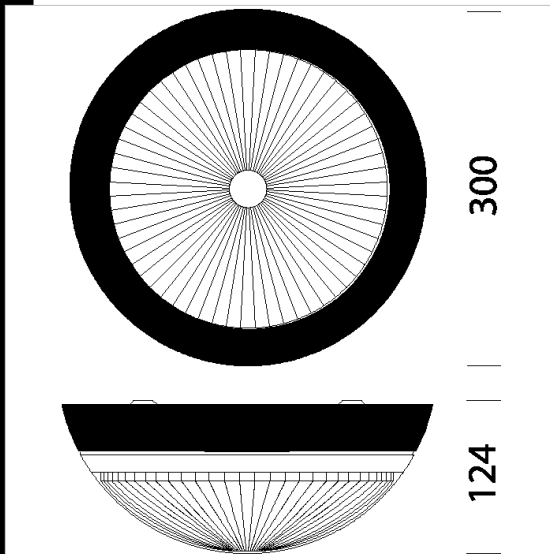

Code	Gear	Kg	Watt	Base	Lamps	Colour
427248-00	CLD CELL	1.25	LED white	-	1500lm-4000K-CR180	GREY

Download

DXF 2D  
- 1844.dxf