



1846 Globo - partially recessed LED



Housing: partially recessed in vandal resistant and V2 self-extinguishing and UV-stabilized polycarbonate.  
 Diffuser: In anti-dazzle, vandal resistant and V2 self-extinguishing polycarbonate, UV-stabilized, smooth outside, dustproof.  
 Equipment: Gasket in environment-friendly material. Cable gland in fiber glass nylon Ø 1/2 gas thread (cable min. Ø 9 max. Ø 12).  
 Regulations: Produced according to applicable EN60598-1 CEI 34 - 21 standards, IP65IK08 degree of protection according to EN 60529 standards. In double insulation.  
 LED white: 14W - 4000K - 1500lm  
 Photobiological safety class: exempt group EN62471.

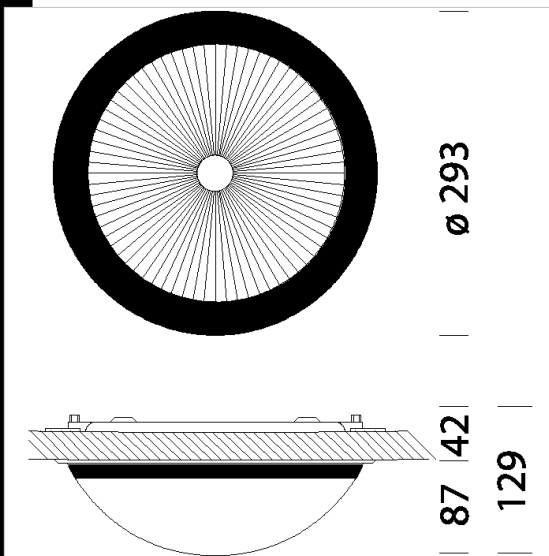

Code	Gear	Kg	Watt	Base	Lamps	Colour
427238-00	CLD CELL	1.70	LED white	-	1500lm-4000K-CRI80	GREY

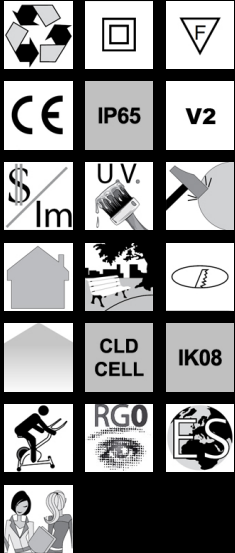

Download  
DXF 2D  
- 1846.dxf