



Housing: complete with graphite aluminium frame with die-cast aluminium end caps.


Diffuser: 8 mm clear and tempered glass, resistant to thermal shock.

Coating: housing in polyester resin for powder coating, resistant to corrosion and saline environments.

Equipment: complete with electrical cable (1mt) for mains connection.

On request: RGBW version.




SICURA - RGBW - TW	
TW (on request)	2700K - 3000K - 4000K - 5500K
RGBW	3000K
Standard beam	standard: elliptic narrow - medium - wide - asymm.
CRI	≥70
Protection rating	IP66 IK08
Insulation class	II
Power consum.	max 60W

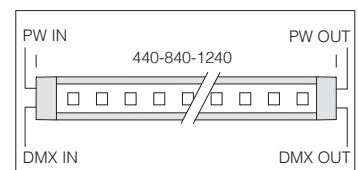




ELECTRICAL DRIVE CHARACTERISTICS	
Electrical connect.	loop in-out
Equipment	RGB White e DMX 4CH 512 (preset 1CH standard)

	LED modules					
	4 F		8 F		12 F	
700mA	Luminous flux			LED Wattage		
LED WHITE	924 lm	1848 lm	2770 lm	9 W	17,5 W	26 W
530mA	Luminous flux			LED Wattage		
LED RED	320 lm	640 lm	960 lm	5 W	10 W	15 W
LED GREEN	560 lm	1120 lm	1680 lm	7 W	14 W	21 W
LED BLUE	160 lm	320 lm	480 lm	7 W	14 W	21 W




Accessories






acc. 535 adjustable connection
s. silver 993970-00
For direct ceiling installation.
Capacity: 6 Kg. **2 for pack.**





acc. 536 bracket
s. silver 993972-00
To install Sicura permanently on walls.
2 for pack.



acc. 376 ceiling moun. unit
galvanized 145151-00
For direct ceiling installation. Only for equipment with direct light. **2 for pack.**




acc. 537 adjustable connection
galvanized 993974-00
To install Sicura on walls or ceiling. To be used for continuous lines. **2 for pack.**





acc. 339 - Connector
993836-00
To be used for mains connection.

On request: continuous line alignment supplied with **sub-code 0072** with surcharge).

Continuous lines with subcode 0072

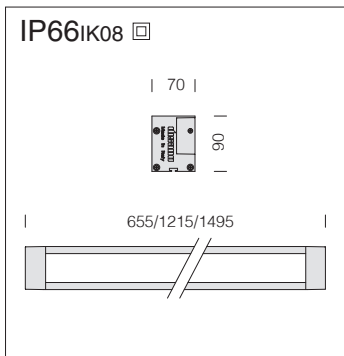


LED: Luminous flux maintenance 80%: 50.000h (L80B20).
Power factor ≥ 0.9

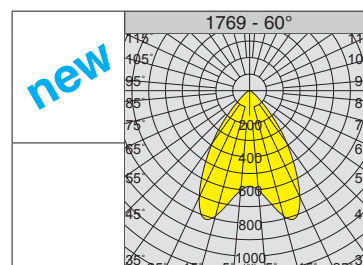
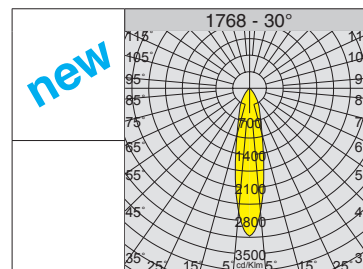


1768 Sicura FS - symmetric						
			CLD CELL		LED (Tp=50°C)	
wattage	colour	L	weight	code	W	K - ϕ lm - CRI - degrees
LED	s. silver	655	3.00	414242-00	25	4000K - 3740lm - CRI \geq 80 - 30°
LED	s. silver	1215	3.50	414243-00	50	4000K - 7480lm - CRI \geq 80 - 30°
LED	s. silver	1495	4.00	414244-00	63	4000K - 9350lm - CRI \geq 80 - 30°

1769 Sicura FL - symmetric						
			CLD CELL		LED (Tp=50°C)	
wattage	colour	L	weight	code	W	K - ϕ lm - CRI - degrees
LED	s. silver	655	3.00	414262-00	25	4000K - 3740lm - CRI \geq 80 - 60°
LED	s. silver	1215	3.50	414263-00	50	4000K - 7480lm - CRI \geq 80 - 60°
LED	s. silver	1495	4.00	414264-00	63	4000K - 9350lm - CRI \geq 80 - 60°

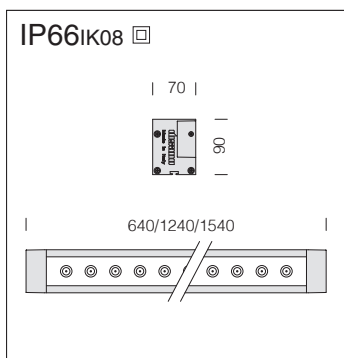

LED: Luminous flux maintenance 80%: 50.000h (L80B20).
Power factor ≥ 0.9

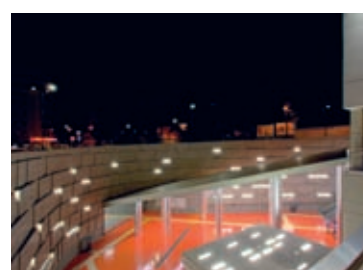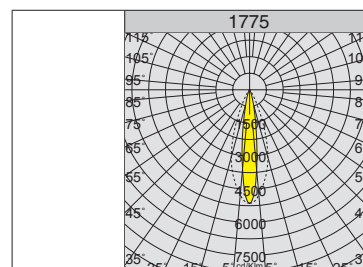

1775 Sicura - elliptic						
			CLD CELL		LED (Tj=25°C)	
wattage	colour	L	weight	code	W	K - ϕ lm - CRI
LED	s. silver	640	3.00	414236-00	28	4000K - 3500lm - CRI \geq 70
LED	s. silver	1240	3.50	414237-00	56	4000K - 7000lm - CRI \geq 70
LED	s. silver	1540	4.00	414238-00	76	4000K - 9000lm - CRI \geq 70

