




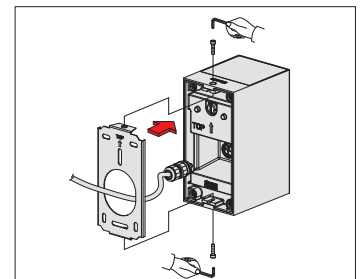

**Housing:** in die-cast aluminium.  
**Diffuser:** in extra-clear tempered glass, 4 mm thick, thermal shock and impact resistant.  
**Coating:** the first stage includes grey epoxy e-coating, resistant to corrosion and saline environments. Then the fixture is coated with an acrylic based UV-stabilised resin.  
**On request:** with surface coating resistant to acetic acid salt spray tests pursuant to standard UNI EN ISO 9227 "Corrosion Tests in Artificial Atmosphere".  
**Optics:** in high-performance metallic V0 polycarbonate.  
**LED:** Luminous flux maintenance 80%: 50.000h (L80B20)  
 Power factor ≥0.92

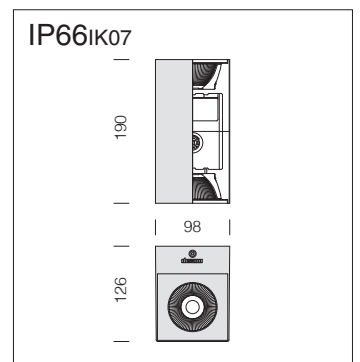


**Mounting:** rapid connection, the fixture does not need to be opened.

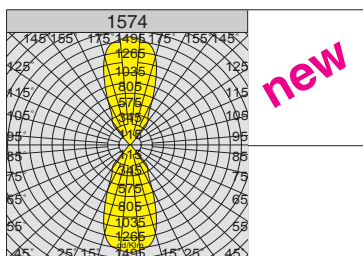

**Standard supply:** supplied with plate for wall installation and cable with with airtight connector for mains connection.

**1574 Square - wall version - direct/indirect light**



		CLD CELL			LED (Tp=25°C)	
wattage (350mA)	colour	weight	code	W	K - ølm 350mA - CRI	
LED COB	white	2.50	420631-00	26	4000K - 1325lm + 1325lm - CRI 90	
LED COB	graphite	2.50	420632-00			
LED COB	white	2.50	420634-00	26	3000K - 1325lm + 1325lm - CRI 90	
LED COB	graphite	2.50	420635-00			
LED COB AMBRE	white	2.50	420631-73	24	2200K - 1950lm + 1950lm - AMBRE	
LED COB AMBRE	graphite	2.50	420632-73			

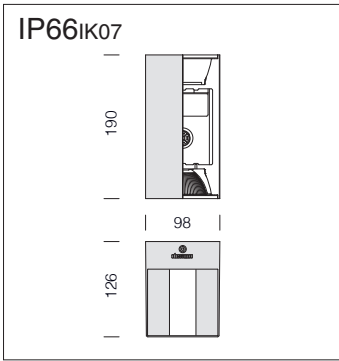

**Standard supply:** supplied with plate for wall installation and cable with with airtight connector for mains connection.




**CRI 90**

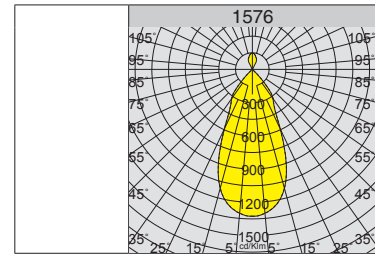

1576 Square - wall version - direct/indirect light with narrow beam					
		CLD CELL		LED (Tp=25°C)	
wattage (350mA)	colour	poids	code	W	K - ølm 350mA - CRI
LED COB	white	2.50	420646-00	14	4000K 1325lm dir. + 270lm ind. - <b>CRI 90</b>
LED COB	graphite	2.50	420647-00		3000K 1325lm dir. + 270lm ind. - <b>CRI 90</b>
LED COB	white	2.50	420648-00	14	4000K 1325lm dir. + 270lm ind. - <b>CRI 90</b>
LED COB	graphite	2.50	420649-00		3000K 1325lm dir. + 270lm ind. - <b>CRI 90</b>
wattage (700mA)				K - ølm 700mA - CRI	
LED COB	white	2.50	420641-00	28	4000K 2650lm dir. + 270lm ind. - <b>CRI 90</b>
LED COB	graphite	2.50	420642-00		3000K 2650lm dir. + 270lm ind. - <b>CRI 90</b>
LED COB	white	2.50	420644-00	28	4000K 2650lm dir. + 270lm ind. - <b>CRI 90</b>
LED COB	graphite	2.50	420645-00		3000K 2650lm dir. + 270lm ind. - <b>CRI 90</b>



- 
- 
- 
- 
- 
- 
- 
- 
- 
- 

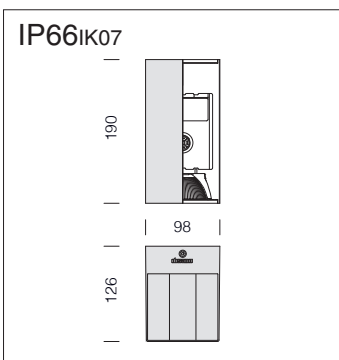

**Standard supply:** supplied with plate for wall installation and cable with with airtight connector for mains connection.



**CRI 90**

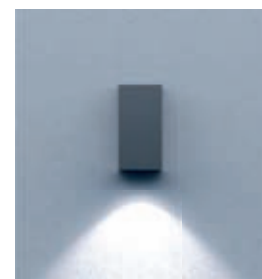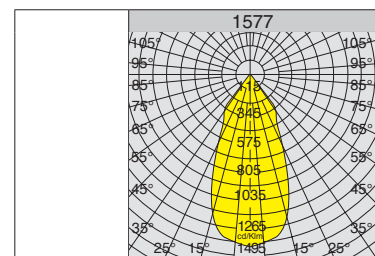

1577 Square - wall version - direct light					
		CLD CELL		LED (Tp=25°C)	
wattage (350mA)	colour	weight	code	W	K - ølm 350mA - CRI
LED COB	white	2.50	420656-00	13	4000K - 1325lm - <b>CRI 90</b>
LED COB	graphite	2.50	420657-00		3000K - 1325lm - <b>CRI 90</b>
LED COB	white	2.50	420658-00	13	4000K - 1325lm - <b>CRI 90</b>
LED COB	graphite	2.50	420659-00		3000K - 1325lm - <b>CRI 90</b>
wattage (700mA)				K - ølm 700mA - CRI	
LED COB	white	2.50	420651-00	26	4000K - 2650lm - <b>CRI 90</b>
LED COB	graphite	2.50	420652-00		3000K - 2650lm - <b>CRI 90</b>
LED COB	white	2.50	420654-00	26	4000K - 2650lm - <b>CRI 90</b>
LED COB	graphite	2.50	420655-00		3000K - 2650lm - <b>CRI 90</b>

- 
- 
- 
- 
- 
- 
- 
- 
- 
- 
-